


## DG 104-M - Elbow male stud ball bearing rotary union

Male metric thread – ED-seal (ISO 9974) / EO 24° cone end

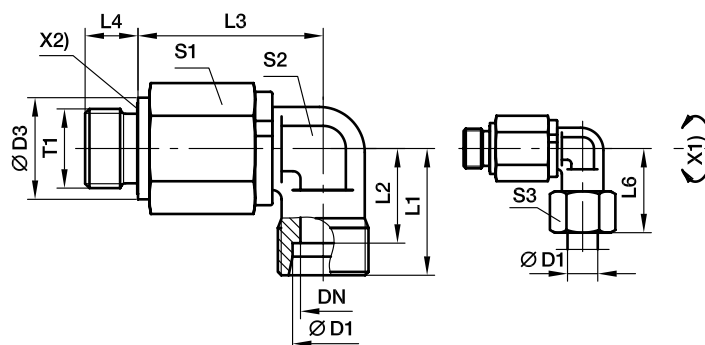

X1) Axis

X2) Elastic-sealing

| Series | Ø<br>D1 | T1       | DN | D3 | L1 | L2   | L3   | L4 | L6 | S1 | S2 | S3 | Weight<br>g/1 piece | Order code |                                 |
|--------|---------|----------|----|----|----|------|------|----|----|----|----|----|---------------------|------------|---------------------------------|
| S      | 06      | M 14×1.5 | 05 | 19 | 23 | 16.0 | 39.5 | 12 | 31 | 22 | 17 | 17 | 132                 | DG104/06SM | Pressure ratings<br>see chart 1 |
|        | 08      | M 14×1.5 | 05 | 19 | 24 | 17.0 | 39.5 | 12 | 32 | 22 | 17 | 19 | 136                 | DG104/08SM |                                 |
|        | 12      | M 18×1.5 | 10 | 22 | 29 | 21.5 | 51.0 | 12 | 38 | 30 | 22 | 24 | 286                 | DG104/12SM |                                 |
|        | 16      | M 22×1.5 | 10 | 27 | 33 | 24.5 | 49.0 | 14 | 43 | 30 | 22 | 30 | 287                 | DG104/16SM |                                 |
|        | 20      | M 27×2.0 | 16 | 32 | 37 | 26.5 | 67.0 | 16 | 48 | 41 | 36 | 36 | 752                 | DG104/20SM |                                 |
|        | 25      | M 33×2.0 | 16 | 40 | 42 | 30.0 | 65.0 | 18 | 54 | 41 | 36 | 46 | 788                 | DG104/25SM |                                 |
|        | 30      | M 42×2.0 | 26 | 50 | 49 | 35.5 | 82.5 | 20 | 62 | 60 | 50 | 50 | 1717                | DG104/30SM |                                 |
|        | 38      | M 48×2.0 | 26 | 55 | 57 | 41.0 | 80.5 | 22 | 72 | 60 | 50 | 60 | 1913                | DG104/38SM |                                 |