
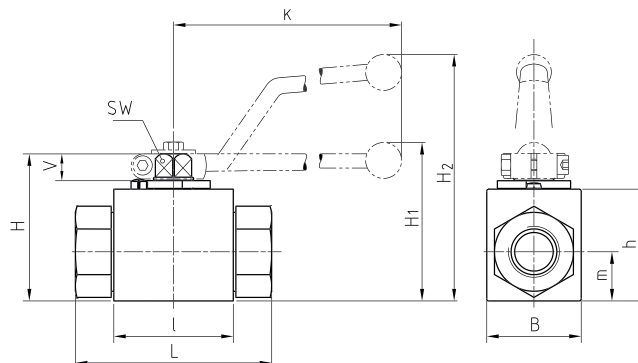


9016-.. - 2-way Metric ball valve

DIN 2353 / ISO 8434-1 Light Series





I	B	H	h	m	V	SW	K	H1	H2	LW	L	RA	i	d	Weight kg/1 piece	Order code	PN (bar)
40	26	47	33	13,5	11	9	115	-	82	5	67	6	7	M 12x1.5	0,36	9016-06	500
40	26	47	33	13,5	11	9	115	-	82	6	67	8	7	M 14x1.5	0,37	9016-08	500
40	26	47	33	13,5	11	9	115	-	82	8	74	10	7	M 16x1.5	0,38	9016-10	500
43	32	52	38	17,5	11	9	115	-	82	10	74	12	7	M 18x1.5	0,50	9016-12	500
48	35	54	40	19	11	9	115	-	82	13	82	15	7	M 22x1.5	0,61	9016-15	500
48	35	54	40	19	11	9	115	-	82	13	82	18	7,5	M 26x1.5	0,60	9016-18-DN13	500
48	38	63	46	19	13	12	160	-	82	15	82	18	7,5	M 26x1.5	0,75	9016-18	420
62	49	75	57	24,5	14	14	200	79	-	20	101	22	7,5	M 30x2.0	1,49	9016-22	420
66	58	83	65	29,5	14	14	200	87	-	25	108	28	7,5	M 36x2.0	2,00	9016-28	315
66	58	83	65	29,5	14	14	200	87	-	25	112	35	10,5	M 45x2.0	2,12	9016-35	315
66	58	83	65	29,5	14	14	200	87	-	25	112	42	11	M 52x2.0	2,27	9016-42	315

Please note the pressure ratings of the tube connections!

9017-.. - 2-way Metric ball valve

DIN 2353 / ISO 8434-1 Heavy Series

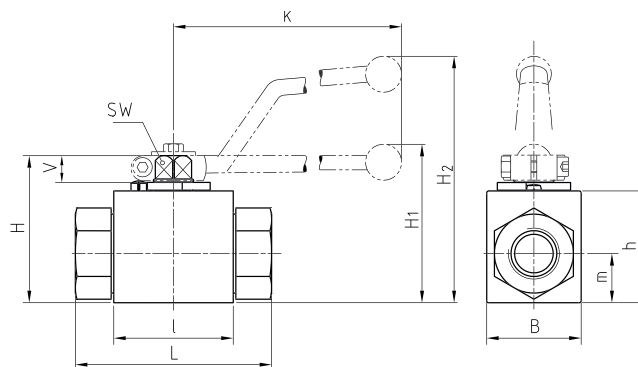

I	B	H	h	m	V	SW	K	H1	H2	LW	L	RA	i	d	Weight kg/1 piece	Order code	PN (bar)
40	26	47	33	13,5	11	9	115	-	82	5	73	8	7	M 16x1.5	0,36	9017-08	500
40	26	47	33	13,5	11	9	115	-	82	6	73	10	7,5	M 18x1.5	0,39	9017-10	500
40	26	47	33	13,5	11	9	115	-	82	8	76	12	7,5	M 20x1.5	0,39	9017-12	500
43	32	52	38	17,5	11	9	115	-	82	10	80	14	8	M 22x1.5	0,50	9017-14	500
48	35	54	40	19	11	9	115	-	82	13	86	16	8,5	M 24x1.5	0,60	9017-16	500
48	35	54	40	19	11	9	115	-	82	13	90	20	10,5	M 30x2.0	0,60	9017-20-DN13	500
48	38	63	46	19	13	12	160	-	82	15	90	20	10,5	M 30x2.0	0,80	9017-20	420
62	49	75	57	24,5	14	14	200	79	-	20	109	25	12	M 36x2.0	1,55	9017-25	420
66	58	83	65	29,5	14	14	200	87	-	25	120	30	13,5	M 42x2.0	2,10	9017-30	315
66	58	83	65	29,5	14	14	200	87	-	25	130	30	13,5	M 42x2.0	3,06	9017-30-PN420	420
66	58	83	65	29,5	14	14	200	87	-	25	124	38	16	M 52x2.0	2,30	9017-38	315

Please note the pressure ratings of the tube connections!