
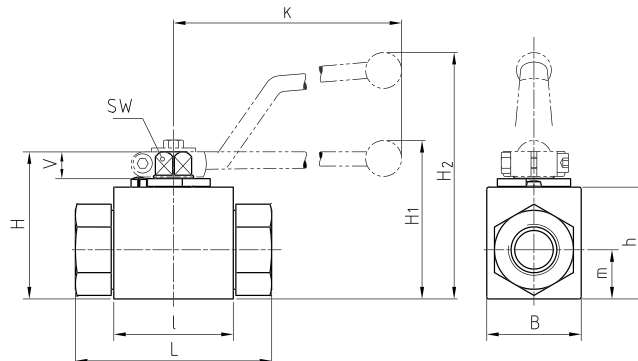


9014-.. - 2-way BSPP ball valve



DIN ISO 228 BSPP Female thread



I	B	H	h	m	V	SW	K	H1	H2	LW	L	i	d	Weight kg/1 piece	Order code	PN (bar)
40	26	47	33	13,5	11	9	115	-	82	5	69	10	G 1/8	0,41	9014-02	500
40	26	47	33	13,5	11	9	115	-	82	6	69	14	G 1/4	0,40	9014-04	500
43	32	52	38	17,5	11	9	115	-	82	10	72	14	G 3/8	0,54	9014-06	500
48	35	54	40	19	11	9	115	-	82	13	83	16,3	G 1/2	0,65	9014-08	500
48	38	63	46	19	13	12	160	-	82	15	83	16	G 5/8	0,70	9014-10	420
62	49	75	57	24,5	14	14	200	79	-	20	95	18	G 3/4	1,50	9014-12	420
66	58	83	65	29,5	14	14	200	87	-	25	113	20	G 1	2,20	9014-16	315
74	70	88	70	34,5	14	14	200	92	-	25	113	20	G 1	3,10	9014-16-PN420	420
66	58	83	65	29,5	14	14	200	87	-	25	120	22	G 1 1/4	2,30	9014-20	315
66	58	83	65	29,5	14	14	200	87	-	25	130	24	G 1 1/2	2,60	9014-24	315

9015-.. - 2-way BSPP ball valve

ANSI B1.20.1 NPT Female thread

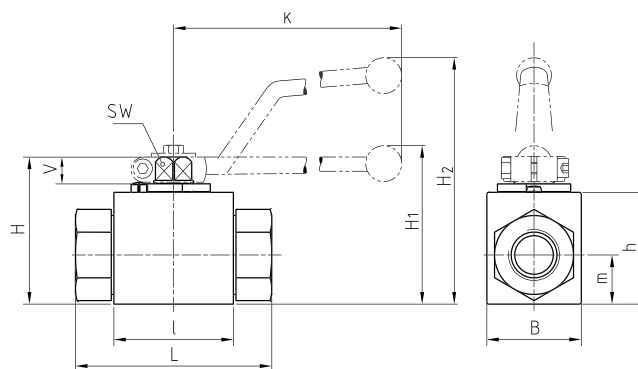

I	B	H	h	m	V	SW	K	H1	H2	LW	L	i	d	Weight kg/1 piece	Order code	PN (bar)
40	26	47	33	13,5	11	9	115	-	82	5	69	10,5	1/8 NPT	0,30	9015-02	500
40	26	47	33	13,5	11	9	115	-	82	6	69	13,7	1/4 NPT	0,40	9015-04	500
43	32	52	38	17,5	11	9	115	-	82	10	72	13,5	3/8 NPT	0,55	9015-06	500
48	35	54	40	19	11	9	115	-	82	13	83	17	1/2 NPT	0,75	9015-08	500
62	49	75	57	24,5	14	14	200	79	-	20	95	18,3	3/4 NPT	1,63	9015-12	420
66	58	83	65	29,5	14	14	200	87	-	25	113	21,6	1 NPT	2,30	9015-16	315
74	70	88	70	34,5	14	14	200	92	-	25	113	21,6	1 NPT	3,16	9015-16-PN420	420
66	58	83	65	29,5	14	14	200	87	-	25	120	22,1	1 1/4 NPT	2,51	9015-20	315
66	58	83	65	29,5	14	14	200	87	-	25	130	22,1	1 1/2 NPT	2,70	9015-24	250