


9030-.. - BSPP 3-way ball valve (L-bore)

DIN ISO 228 BSPP Female thread

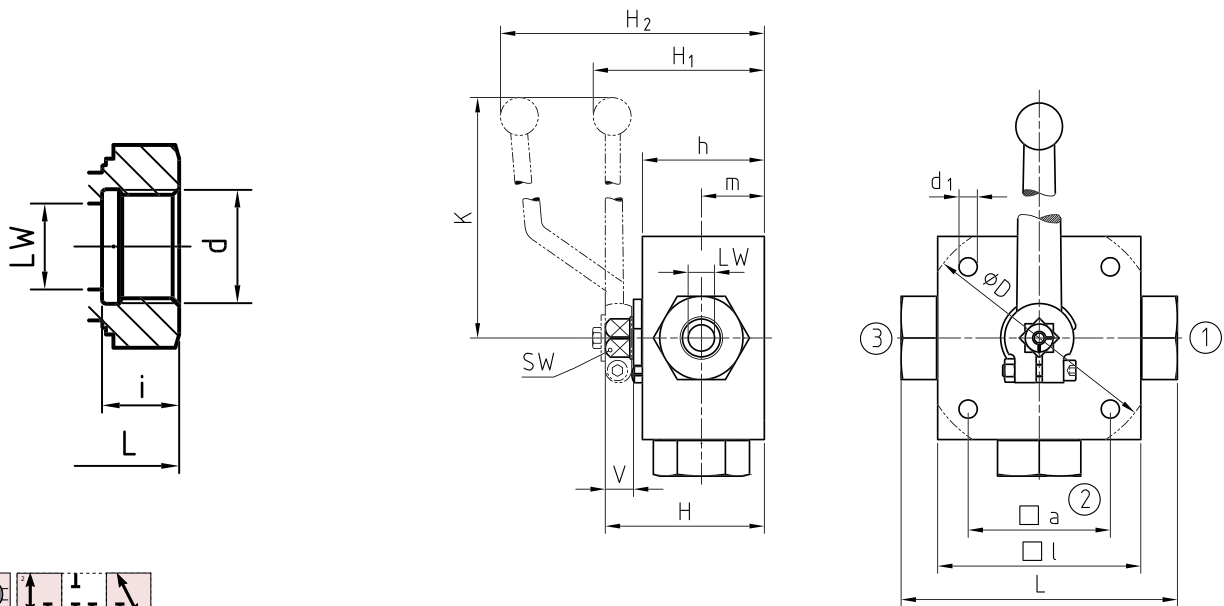

LW	D	a	l	d ₁	H	h	m	K	V	SW	H ₁	H ₂	L	i	d	Weight kg/1 piece	Order code	PN (bar)
5	-	55	70	6,5	58	40	22	160	14	12	-	101	100	10	G 1/8	1,60	9030-02	500
5	-	55	70	6,5	58	40	22	160	14	12	-	101	100	14	G 1/4	1,60	9030-04	500
8	-	65	80	6,5	68	50	27	200	14	14	72	-	115	14	G 3/8	2,70	9030-06	500
13	-	80	100	9	78	60	31	200	14	14	82	-	136	16,3	G 1/2	4,90	9030-08	400
13	-	80	100	9	78	60	31	200	14	14	82	-	139	18	G 5/8	4,90	9030-10	400
18	138	85	113	8,5	88	67	36,5	320	16,5	17	96	-	154	18	G 3/4	6,70	9030-12	315
23	138	85	119	8,5	103	82	47,5	320	16,5	17	112	-	172	20	G 1	8,30	9030-16	315
23	138	85	119	8,5	103	82	47,5	320	16,5	17	112	-	180	22	G 1 1/4	8,50	9030-20	315
23	138	85	119	8,5	103	82	47,5	320	16,5	17	112	-	180	24	G 1 1/2	8,50	9030-24	250