


WSV - Bulkhead elbow

EO 24° cone end

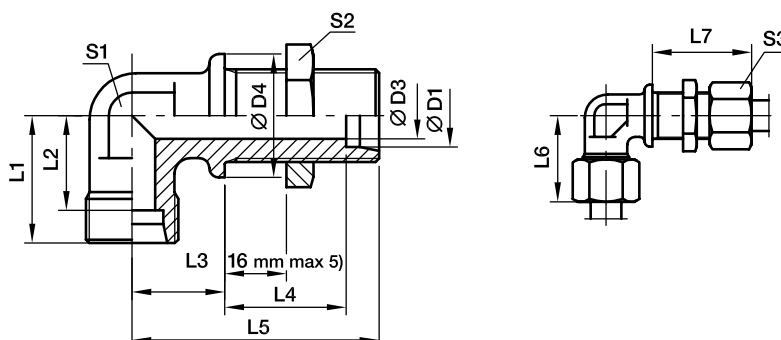

Series	Ø D1	D3	D4	L1	L2	L3	L4	L5	L6	L7	S1	S2	S3	Weight g/1 piece	Order code	PN (bar)		
																CF	71	MS
L	06	4	17	19	12.0	14	27.0	48	27	42	12	17	14	51	WSV06L	315	315	200
	08	6	19	21	14.0	17	27.0	51	29	42	12	19	17	61	WSV08L	315	315	200
	10	8	22	22	15.0	18	28.0	53	30	43	14	22	19	78	WSV10L	315	315	200
	12	10	24	24	17.0	20	29.0	56	32	44	17	24	22	85	WSV12L	315	315	200
	15	12	27	28	21.0	23	31.0	61	36	46	19	30	27	150	WSV15L	315	315	200
	18	15	32	31	23.5	24	32.5	64	40	49	24	36	32	238	WSV18L	315	315	200
	22	19	36	35	27.5	30	34.5	72	44	51	27	41	36	327	WSV22L	160	160	
	28	24	42	38	30.5	34	35.5	77	47	52	36	46	41	482	WSV28L	160	160	
	35	30	50	45	34.5	39	36.5	86	56	58	41	55	50	729	WSV35L	160	160	
	42	36	60	51	40.0	43	36.0	90	63	59	50	65	60	1091	WSV42L	160	160	
S	06	4	19	23	16.0	17	29.0	53	31	44	12	19	17	72	WSV06S	630	630	
	08	5	22	24	17.0	18	29.0	54	32	44	14	22	19	99	WSV08S	630	630	
	10	7	24	25	17.5	20	29.5	57	34	46	17	24	22	128	WSV10S	630	630	
	12	8	27	29	21.5	21	30.5	59	38	47	17	27	24	168	WSV12S	630	630	
	14	10	27	30	22.0	23	32.0	63	40	50	19	30	27	194	WSV14S	630	630	
	16	12	30	33	24.5	24	31.5	64	43	50	24	32	30	249	WSV16S	400	400	
	20	16	36	37	26.5	30	33.5	74	48	55	27	41	36	390	WSV20S	400	400	
	25	20	42	42	30.0	34	35.0	81	54	59	36	46	46	618	WSV25S	400	400	
	30	25	50	49	35.5	39	37.5	90	62	64	41	50	50	889	WSV30S	400	400	
	38	32	60	57	41.0	43	37.0	96	72	68	50	65	60	1337	WSV38S	315	315	

5) Bulkhead thickness min.
06-18 L and 06-16 S = 3 mm
22-42 L and 20-38 S = 4 mm

Order code suffixes			
	Stainless Steel	Brass	Body Only
Suffix	71	MS	X
Example	WSV12L71	WSV12LMS	WSV12LOMD