


RED - Tube end reducer

EO 24° DKO swivel / EO 24° cone end

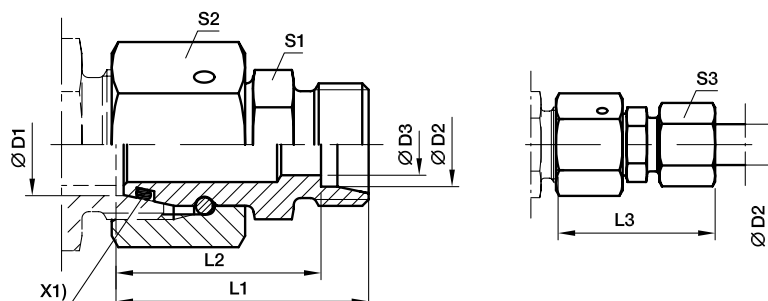


X1) O-ring OR

Series	Ø D1	Ø D2	D3	L1	L2	L3	S1	S2	S3	Weight g/1 piece	Order code	PN (bar)	
												CF	71
L/LL	06	04	2.5	28.5	24.5	34.0	9	14	10	17	RED06L/04LL	100	100
L	08	06	4.0	30.5	23.5	38.0	12	17	14	29	RED08/06L	500	315
L	10	06	4.0	32.0	25.0	40.0	14	19	14	36	RED10/06L	500	315
L	10	08	6.0	32.0	25.0	40.0	14	19	17	38	RED10/08L	500	315
L	12	06	4.0	32.0	25.0	40.0	17	22	14	49	RED12/06L	400	315
L	12	08	6.0	32.0	25.0	40.0	17	22	17	49	RED12/08L	400	315
L	12	10	8.0	33.0	26.0	41.0	17	22	19	51	RED12/10L	400	315
L	15	06	4.0	35.5	28.5	43.0	19	27	14	81	RED15/06L	400	315
L	15	08	6.0	35.5	28.5	43.0	19	27	17	85	RED15/08L	400	315
L	15	10	8.0	36.5	29.5	44.0	19	27	19	83	RED15/10L	400	315
L	15	12	10.0	36.5	29.5	44.0	19	27	22	83	RED15/12L	400	315
L	18	06	4.0	35.0	28.0	43.0	24	32	14	109	RED18/06L	400	315
L	18	08	6.0	35.0	28.0	43.0	24	32	17	111	RED18/08L	400	315
L	18	10	8.0	36.0	29.0	44.0	24	32	19	110	RED18/10L	400	315
L	18	12	10.0	36.0	29.0	44.0	24	32	22	110	RED18/12L	400	315
L	18	15	12.0	37.0	30.0	45.0	24	32	27	115	RED18/15L	400	315
L/S	18	16	12.0	40.0	31.5	49.5	27	32	30	138	RED18L/16S	400	315
L	22	06	4.0	39.0	32.0	47.0	27	36	14	158	RED22/06L	250	160
L	22	08	6.0	39.0	32.0	47.0	27	36	17	158	RED22/08L	250	160
L	22	10	8.0	40.0	33.0	48.0	27	36	19	159	RED22/10L	250	160
L	22	12	10.0	40.0	33.0	48.0	27	36	22	157	RED22/12L	250	160
L	22	15	12.0	41.0	34.0	49.0	27	36	27	164	RED22/15L	250	160
L/S	22	16	12.0	43.0	34.5	52.5	27	36	30	173	RED22L/16S	250	160
L	22	18	15.0	41.0	33.5	50.0	27	36	32	167	RED22/18L	250	160
L/S	22	20	16.0	45.0	34.5	56.0	32	36	36	203	RED22L/20S	250	160
L	28	06	4.0	41.0	34.0	49.0	32	41	14	219	RED28/06L	250	160
L	28	08	6.0	41.0	34.0	49.0	32	41	17	221	RED28/08L	250	160
L	28	10	8.0	42.0	35.0	50.0	32	41	19	213	RED28/10L	250	160
L	28	12	10.0	42.0	35.0	50.0	32	41	22	213	RED28/12L	250	160
L	28	15	12.0	43.0	36.0	51.0	32	41	27	218	RED28/15L	250	160
L/S	28	16	12.0	45.0	36.5	54.5	32	41	30	227	RED28L/16S	250	160
L	28	18	15.0	43.0	35.5	52.0	32	41	32	220	RED28/18L	250	160
L	28	22	19.0	45.0	37.5	54.0	32	41	36	222	RED28/22L	250	160
L/S	28	25	20.0	50.0	38.0	62.0	41	41	46	300	RED28L/25S	250	160
L	35	06	4.0	44.0	37.0	52.0	41	50	14	318	RED35/06L	250	160
L	35	08	6.0	44.0	37.0	52.0	41	50	17	318	RED35/08L	250	160
L	35	10	8.0	45.0	38.0	53.0	41	50	19	318	RED35/10L	250	160
L	35	12	10.0	45.0	38.0	53.0	41	50	22	324	RED35/12L	250	160
L	35	15	12.0	46.0	39.0	54.0	41	50	27	328	RED35/15L	250	160
L	35	18	15.0	46.0	38.5	55.0	41	50	32	328	RED35/18L	250	160
L	35	22	19.0	48.0	40.5	57.0	41	50	36	331	RED35/22L	250	160
L/S	35	25	20.0	52.0	40.0	64.0	41	50	46	366	RED35L/25S	250	160

continued on next page...

RED - Tube end reducer

EO 24° DKO swivel / EO 24° cone end

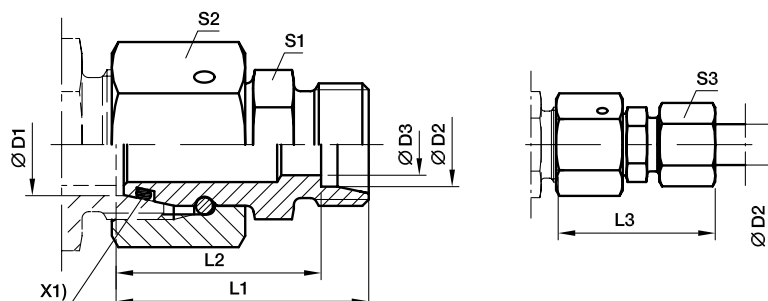


X1) O-ring OR

Series	Ø D1	Ø D2	D3	L1	L2	L3	S1	S2	S3	Weight g/1 piece	Order code	PN (bar)	
												CF	71
L	35	28	24.0	48.0	40.5	57.0	41	50	41	327	RED35/28L	250	160
L/S	35	30	25.0	55.0	41.5	68.0	46	50	50	435	RED35L/30S	250	160
L	42	10	8.0	48.5	41.5	56.0	50	60	19	537	RED42/10L	250	160
L	42	12	10.0	48.5	41.5	56.0	50	60	22	538	RED42/12L	250	160
L	42	15	12.0	49.5	42.5	58.0	50	60	27	534	RED42/15L	250	160
L	42	18	15.0	49.5	42.0	58.0	50	60	32	544	RED42/18L	250	160
L	42	22	19.0	51.5	44.0	60.0	50	60	36	543	RED42/22L	250	160
L	42	28	24.0	51.5	44.0	61.0	50	60	41	539	RED42/28L	250	160
L/S	42	30	25.0	57.5	44.0	70.5	50	60	50	588	RED42L/30S	250	160
L	42	35	30.0	53.5	43.0	65.0	50	60	50	541	RED42/35L	250	160
L/S	42	38	32.0	61.5	45.5	76.0	55	60	60	701	RED42L/38S	250	160

Order code suffixes			
	Stainless Steel		Body Only
Suffix	71		OMD
Example	RED15/12L71		RED15/12LOMD

RED - Tube end reducer

EO 24° DKO swivel / EO 24° cone end

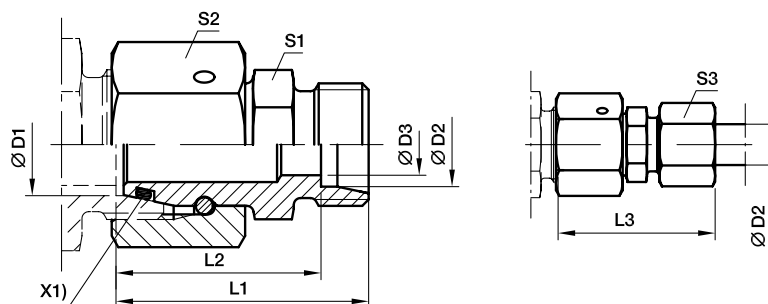


X1) O-ring OR

Series	Ø D1	Ø D2	D3	L1	L2	L3	S1	S2	S3	Weight g/1 piece	Order code	PN (bar)	
												CF	71
S	08	06	4	34.0	27.0	42	14	19	17	42	RED08/06S	800	630
S	10	06	4	34.5	27.5	42	17	22	17	55	RED10/06S	800	630
S	10	08	5	34.5	27.5	42	17	22	19	58	RED10/08S	800	630
S	12	06	4	36.0	29.0	44	17	24	17	66	RED12/06S	630	630
S	12	08	5	36.0	29.0	44	17	24	19	68	RED12/08S	630	630
S	12	10	7	37.0	29.5	46	19	24	22	75	RED12/10S	630	630
S	14	06	4	38.5	31.5	46	19	27	17	88	RED14/06S	630	630
S	14	08	5	38.5	31.5	46	19	27	19	90	RED14/08S	630	630
S	14	10	7	38.5	31.0	47	19	27	22	91	RED14/10S	630	630
S	14	12	8	38.5	31.0	47	22	27	24	100	RED14/12S	630	630
S	16	06	4	39.0	32.0	47	22	30	17	112	RED16/06S	630	400
S	16	08	5	39.0	32.0	47	22	30	19	114	RED16/08S	630	400
S	16	10	7	39.0	31.5	48	22	30	22	115	RED16/10S	630	400
S	16	12	8	39.0	31.5	48	22	30	24	118	RED16/12S	630	400
S	16	14	10	41.0	33.0	51	24	30	27	128	RED16/14S	630	400
S/L	16	15	11	39.0	32.0	47	24	30	27	120	RED16S/15L	400	315
S	20	06	4	43.0	36.0	51	27	36	17	172	RED20/06S	420	400
S	20	08	5	43.0	36.0	51	27	36	19	174	RED20/08S	420	400
S	20	10	7	43.0	35.5	52	27	36	22	174	RED20/10S	420	400
S	20	12	8	43.0	35.5	52	27	36	24	177	RED20/12S	420	400
S	20	14	10	45.0	37.0	55	27	36	27	182	RED20/14S	420	400
S/L	20	15	12	43.0	36.0	51	27	36	27	173	RED20S/15L	400	315
S	20	16	12	45.0	36.5	55	27	36	30	182	RED20/16S	420	400
S/L	20	18	14	43.0	35.5	51	27	36	32	178	RED20S/18L	400	315
S	25	06	4	45.5	38.5	53	32	46	17	294	RED25/06S	420	400
S	25	08	5	45.5	38.5	53	32	46	19	295	RED25/08S	420	400
S	25	10	7	45.5	38.0	54	32	46	22	296	RED25/10S	420	400
S	25	12	8	45.5	38.0	54	32	46	24	299	RED25/12S	420	400
S	25	14	10	47.5	39.5	57	32	46	27	303	RED25/14S	420	400
S	25	16	12	47.5	39.0	57	32	46	30	304	RED25/16S	420	400
S/L	25	18	15	45.5	38.0	54	32	46	32	299	RED25S/18L	400	315
S	25	20	16	49.5	39.0	61	32	46	36	315	RED25/20S	420	400
S/L	25	22	18	47.5	40.0	56	32	46	36	304	RED25S/22L	250	160
S	30	06	4	51.0	44.0	59	41	50	17	412	RED30/06S	420	400
S	30	08	5	51.0	44.0	59	41	50	19	404	RED30/08S	420	400
S	30	10	7	51.0	43.5	60	41	50	22	405	RED30/10S	420	400
S	30	12	8	51.0	43.5	60	41	50	24	405	RED30/12S	420	400
S	30	14	10	53.0	45.0	63	41	50	27	408	RED30/14S	420	400
S	30	16	12	53.0	44.5	63	41	50	30	412	RED30/16S	420	400
S	30	20	16	55.0	44.5	66	41	50	36	421	RED30/20S	420	400
S/L	30	22	19	53.0	45.5	61	41	50	36	406	RED30S/22L	250	160

continued on next page...

RED - Tube end reducer

EO 24° DKO swivel / EO 24° cone end

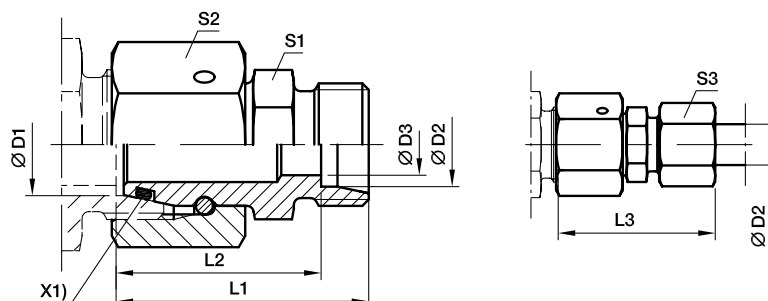

X1) O-ring OR

Series	Ø D1	Ø D2	D3	L1	L2	L3	S1	S2	S3	Weight g/1 piece	Order code	PN (bar)	
												CF	71
S	30	25	20	57.0	45.0	69	41	50	46	439	RED30/25S	420	400
S/L	30	28	23	53.0	45.5	62	41	50	41	406	RED30S/28L	250	160
S	38	06	4	54.5	47.5	62	50	60	17	556	RED38/06S	420	315
S	38	08	5	54.5	47.5	62	50	60	19	581	RED38/08S	420	315
S	38	10	7	54.5	47.0	63	50	60	22	579	RED38/10S	420	315
S	38	12	8	54.5	47.0	63	50	60	24	577	RED38/12S	420	315
S	38	14	10	56.5	48.5	66	50	60	27	579	RED38/14S	420	315
S	38	16	12	56.5	48.0	66	50	60	30	580	RED38/16S	420	315
S	38	20	16	58.5	48.0	70	50	60	36	601	RED38/20S	420	315
S	38	25	20	60.5	48.5	73	50	60	46	615	RED38/25S	420	315
S/L	38	28	24	56.5	49.0	65	50	60	41	573	RED38S/28L	250	160
S	38	30	25	62.5	49.0	76	50	60	50	625	RED38/30S	420	315
S/L	38	35	30	58.5	48.0	69	50	60	50	588	RED38S/35L	250	160

Order code suffixes			
	Stainless Steel		Body Only
Suffix	71		OMD
Example	RED16/12S71		RED16/12SOMD