


9020-.. - Flange ball valve with SAE connection

ISO 6162-1 and -2 (double flange pattern)

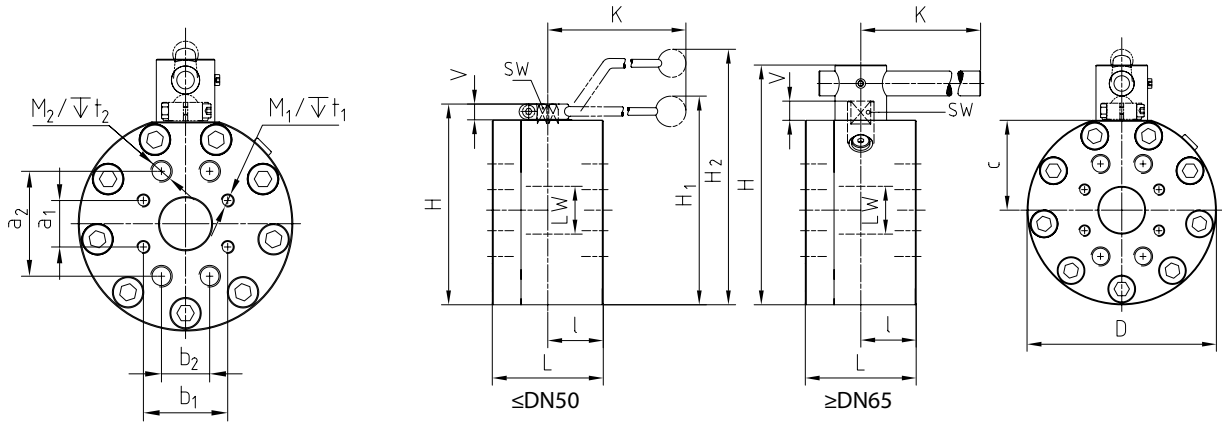

LW	L	I	D	H	c	V	K	SW	H ₁	H ₂	a ₁	b ₁	M ₁	T ₁	a ₂	b ₂	M ₂	T ₂	Weight kg/1 piece	Order code	PN (bar)
15	75	35	88	88	31	13	160	12	-	132	17,5	38,1	M8	18	40,5	18,2	M8	18	2.96	9020-08	350/420
20	80	35	98	100	36,5	14	200	14	103	-	22,2	47,6	M10	18	50,8	23,8	M10	18	4.20	9020-12	350/420
25	88	38	118	113	39,5	14	200	14	116	-	27,8	57,2	M12	20	52,4	26,2	M10	20	6.00	9020-16	350/420
32	100	50	145	158	68	17	320	17	167	-	30,2	58,7	M10	20	66,7	31,8	M12	22	11.70	9020-20	280/420
38	110	55	165	178	78	17	320	17	187	-	35,7	69,9	M12	21	79,4	36,5	M16	27	17.10	9020-24	210/420
48	116	58	198	210	94	17	320	17	219	-	42,9	77,8	M12	20	96,8	44,5	M20	28	24.60	9020-32	210/420
63	170	75	218	275	100	20	600	16	-	-	58,7	123,8	M24	41	88,9	50,8	M12	19	44.40	9020-40	175/420
76	170	79	258	315	114,5	26	600	19	-	-	71,4	152,4	M30	17	106,4	61,9	M16	24	60.40	9020-48	160/420

Please note the pressure ratings of the tube connections!