
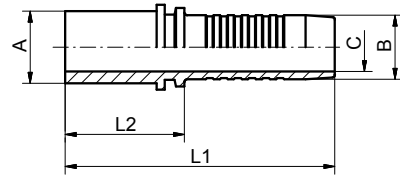



BEL, for 24° cutting ring connection, light duty series



DN	A	B / mm	C / mm	L1 / mm	L2 / mm	Partnumber
6	6L	6,7	3,9	59,5	29,5	10290-06-04RVS
6	8L	6,7	3,9	59,5	29,5	10290-08-04RVS
8	8L	8,0	5,4	59,5	29,5	10290-08-05RVS
8	10L	8,0	5,4	60,5	30,5	10290-10-05RVS
10	10L	9,6	6,5	63,8	30,5	10290-10-06RVS
10	12L	9,6	6,5	63,8	30,5	10290-12-06RVS
10	15L	9,6	6,5	63,8	30,5	10290-15-06RVS
12	12L	12,8	9,5	68,5	33,2	10290-12-08RVS
12	15L	12,8	9,5	69,0	33,7	10290-15-08RVS
16	18L	16,0	12,6	72,5	34,2	10290-18-10RVS
20	22L	19,1	14,8	82,5	36,7	10290-22-12RVS
25	28L	25,9	20,0	94,5	39,5	10290-28-16RVS
32	35L	32,5	26,0	106,5	45,7	10290-35-20RVS
40	42L	38,9	31,0	116,0	48,5	10290-42-24RVS

Material : 1.4571. Other materials on request

BES, for 24° cutting ring connection, heavy duty series

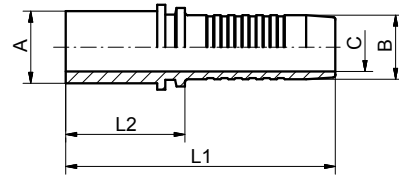

DN	A	B / mm	C / mm	L1 / mm	L2 / mm	Partnumber
6	8S	6,7	3,9	63,5	33,5	10290-08-04RVS
6	10S	6,7	3,9	63,5	33,5	10290-10-04RVS
6	12S	6,7	3,9	63,5	33,5	10290-12-04RVS
8	12S	8,0	5,4	63,5	33,5	10290-12-05RVS
10	12S	9,6	6,5	66,8	33,5	10290-12-06RVS
10	14S	9,6	6,5	69,8	36,5	10290-14-06RVS
10	16S	9,6	6,5	70,8	37,5	10290-16-06RVS
12	16S	12,8	9,5	73,5	38,2	10290-16-08RVS
16	20S	16,0	12,6	82,5	44,2	10290-20-10RVS
20	20S	19,1	14,8	90,5	44,7	10290-20-12RVS
20	25S	19,1	14,8	94,5	48,7	10290-25-12RVS
20	30S	19,1	14,8	98,5	52,7	10290-30-12RVS
25	30S	25,9	20,0	108,5	53,5	10290-30-16RVS
32	38S	32,5	26,0	118,5	58,7	10296-38-20RVS

Material : 1.4571. Other materials on request