



## Instant Connection of 2 hydraulic lines




### Hydraulic specification

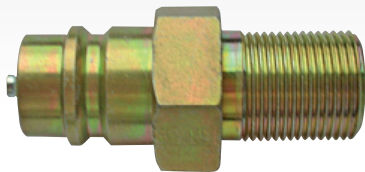

Type	<b>ISO A</b>
Size	<b>1/2"</b>
Quantity	<b>2</b>
Operating Flow	<b>45 L/min</b>
Operating Pressure	<b>250 bar</b>
Pressure Drop	<b>1.50 bar</b>
End Termination	<b>M 22x150</b>
Fitting	<b>Male</b>
O'ring	<b>NBR / Viton</b>

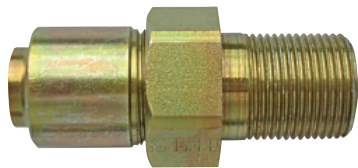

Type	<b>NS</b>
Size	<b>1/2"</b>
Quantity	<b>2</b>
Operating Flow	<b>50 L/min</b>
Operating Pressure	<b>350 bar</b>
Pressure Drop	<b>2.50 bar</b>
End Termination	<b>M 22x150</b>
Fitting	<b>Male</b>
O'ring	<b>NBR / Viton</b>



Type	<b>NS</b>
Size	<b>1/2"</b>
Quantity	<b>2</b>
Operating Flow	<b>50 L/min</b>
Operating Pressure	<b>350 bar</b>
Pressure Drop	<b>2.50 bar</b>
End Termination	<b>M 22x150</b>
Fitting	<b>Female</b>
O'ring	<b>NBR / Viton</b>

Mach Connectors reserves the right to modify characteristics, equipment and prices of the models shown without prior notice. This document is under no circumstances legally binding. No part of this publication may be reproduced.