


5152 / 5153 - SAE Straight 4 bolt flange with BSPP thread

SAE Counter flange / Female BSPP thread
(ISO 6162-1/-2)

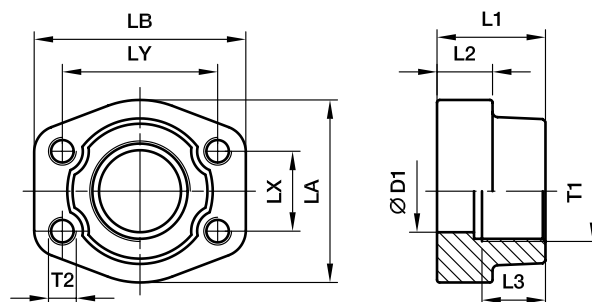

3000 PSI Series

Nom. flange size SAE (in.)	ISO (DN)	T1	D1	L1	L2	L3	LA	LB	LX	LY	Weight (steel) kg/piece	Order code*	PN (bar) S SS
1/2	13	G 3/8	13	36	16	19	46	57	17.5	38.1	0.26	5152-06-08	345 345
1/2	13	G 1/2	13	36	16	19	46	57	17.5	38.1	0.28	5152-08-08	345 345
3/4	19	G 3/4	19	36	18	19	50	65	22.3	47.6	0.41	5152-12-12	345 345
3/4	13	G 1/2	13	36	18	19	50	65	22.3	47.6	0.44	5152-08-12	345 345
1	25	G 1	25	38	18	22	55	70	26.2	52.4	0.49	5152-16-16	345 345
1	19	G 3/4	19	35	21	19	55	70	26.2	52.4	0.55	5152-12-16	345 345
1 1/4	32	G 1 1/4	32	40	21	22	68	79	30.2	58.7	0.71	5152-20-20	276 276
1 1/4	25	G 1	25	42	25	22	65	80	30.2	58.7	0.85	5152-16-20	276 276
1 1/2	38	G 1 1/2	38	45	25	24	78	93	35.7	69.9	1.12	5152-24-24	207 207
1 1/2	32	G 1 1/4	32	45	27	24	78	95	35.7	69.9	1.24	5152-20-24	207 207
2	51	G 2	51	45	25	30	89	103	42.9	77.8	1.24	5152-32-32	207 207
2	38	G 1 1/2	38	45	25	26	89	103	42.9	77.8	1.59	5152-24-32	207 207
2 1/2	64	G 2 1/2	63	50	25	30	101	115	50.8	88.9	1.66	5152-40-40	172 172
2 1/2	51	G 2	51	50	25	30	101	115	50.8	88.9	2.20	5152-32-40	172 172
3	76	G 3	73	50	27	30	124	135	61.9	106.4	2.37	5152-48-48	138 138
3	63	G 2 1/2	63	50	27	30	124	135	61.9	106.4	2.65	5152-40-48	138 138
3 1/2	89	G 3 1/2	89	50	27	30	136	152	69.9	120.7	2.51	5152-56-56	34 34
3 1/2	73	G 3	73	48	27	34	136	152	69.9	120.7	3.37	5152-48-56	34 34
4	102	G 4	99	50	27	30	146	162	77.8	130.2	2.87	5152-64-64	34 34
4	89	G 3 1/2	89	48	27	34	146	162	77.8	130.2	3.39	5152-56-64	34 34
5	127	G 5	120	50	28	30	180	184	92.1	152.4	5.80	5152-80-80	34 34

6000 PSI Series

1/2	13	G 3/8	13	36	16	19	46	57	18.2	40.5	0.26	5153-06-08	420	420
1/2	13	G 1/2	13	36	16	19	46	57	18.2	40.5	0.29	5153-08-08	420	420
3/4	19	G 3/4	19	35	21	22	55	71	23.8	50.8	0.55	5153-12-12	420	420
3/4	13	G 1/2	13	35	21	22	55	71	23.8	50.8	0.60	5153-08-12	420	420
1	25	G 1	25	42	25	24	65	81	27.8	57.2	0.87	5153-16-16	420	420
1	19	G 3/4	19	42	25	24	65	81	27.8	57.2	0.90	5153-12-16	420	420
1 1/4	32	G 1 1/4	32	45	27	25	78	95	31.8	66.6	1.21	5153-20-20	420	420
1 1/4	25	G 1	25	45	27	25	78	95	31.8	66.6	1.34	5153-16-20	420	420
1 1/2	38	G 1 1/2	38	50	30	28	94	112	36.5	79.3	1.90	5153-24-24	420	420
1 1/2	32	G 1 1/4	32	50	30	28	94	112	36.5	79.3	2.03	5153-20-24	420	420
2	51	G 2	51	65	37	30	114	134	44.5	96.8	3.43	5153-32-32	420	420
2	38	G 1 1/2	38	65	37	30	114	134	44.5	96.8	3.92	5153-24-32	420	420
2 1/2	64	G 2 1/2	63	80	45	32	152	180	58.7	123.8	6.98	5153-40-40	420	420
3	76	G 3	73	90	55	40	178	208	71.4	152.4	13.00	5153-48-48	420	420

*Please add suffix **RVS** after partnumber if stainless steel is required.