


5152N / 5153N - SAE Straight 4 bolt flange with NPT thread

SAE Counter flange / Female NPT thread
(ISO 6162-1/-2)

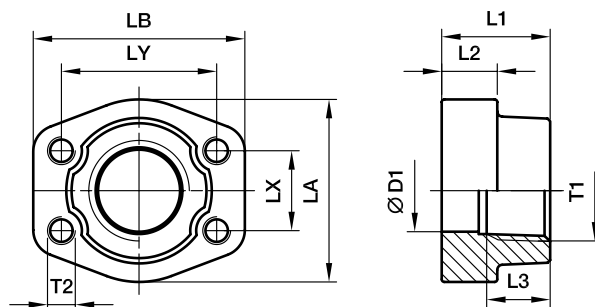

3000 PSI Series

Nom. flange size SAE (in.)	ISO (DN)	T1	D1	L1	L2	L3	LA	LB	LX	LY	Weight (steel) kg/piece	Order code*	PN (bar)	
													S	SS
1/2	13	3/8 NPT	13	36	16	19	47	57	17.5	38.1	0.25	5152N-06-08	345	345
1/2	13	1/2 NPT	13	36	16	19	47	57	17.5	38.1	0.28	5152N-08-08	345	345
3/4	19	3/4 NPT	19	36	18	19	49	66	22.3	47.6	0.39	5152N-12-12	345	345
1	25	1 NPT	25	38	18	19	53	71	26.2	52.4	0.46	5152N-16-16	345	345
1 1/4	32	1 1/4 NPT	31	41	21	22	69	80	30.2	58.7	0.66	5152N-20-20	276	276
1 1/2		1 1/2 NPT	38	44	25	24	77	94	35.7	69.9	1.05	5152N-24-24	207	207
2	51	2 NPT	50	45	25	26	89	103	42.9	77.8	1.19	5152N-32-32	207	207
2 1/2	64	2 1/2 NPT	63	50	25	30	101	115	50.8	88.9	1.40	5152N-40-40	172	172
3	76	3 NPT	73	50	27	30	124	135	61.9	106.4	2.15	5152N-48-48	138	138
3 1/2	89	3 1/2 NPT	89	50	27	30	136	152	69.9	120.7	2.40	5152N-56-56	34	34
4	102	4 NPT	99	50	27	30	146	162	77.8	130.2	2.85	5152N-64-64	34	34
5	127	5 NPT	120	50	28	30	180	184	92.1	152.4	3.25	5152N-80-80	34	34

6000 PSI Series

1/2	13	3/8 NPT	13	36	16	19	47	57	18.2	40.5	0.26	5153N-06-08	420	420
1/2	13	1/2 NPT	13	36	16	19	47	57	18.2	40.5	0.29	5153N-08-08	420	420
3/4	19	3/4 NPT	19	36	19	22	53	71	23.8	50.8	0.50	5153N-12-12	420	420
1	25	1 NPT	25	44	24	24	69	80	27.8	57.2	0.76	5153N-16-16	420	420
1 1/4	32	1 1/4 NPT	31	44	27	25	77	94	31.8	66.6	1.20	5153N-20-20	420	420
1 1/2	32	1 1/2 NPT	38	51	30	28	89	106	36.5	79.3	1.65	5153N-24-24	420	420
2	51	2 NPT	50	70	37	33	116	135	44.5	96.8	2.45	5153N-32-32	420	420
2 1/2	64	2 1/2 NPT	63	75	45	35	150	166	58.7	123.8	3.05	5153N-40-40	420	420
3	76	3 NPT	73	90	55	40	178	208	71.4	152.4	3.45	5153N-48-48	420	420

*Please add suffix **RVS** after partnumber if stainless steel is required.