


## 5062 / 5063 - SAE Flange locking plate

ISO 6162-1/-2

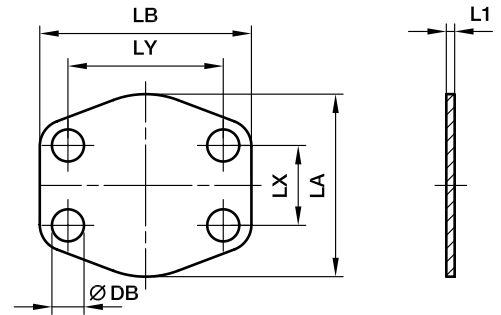

### 3000 PSI Series

| Nom. flange size |             | L1 | LA  | LB  | LX   | LY    | DB   | Weight<br>(steel)<br>kg/piece | Order code*    | PN (bar) |    |
|------------------|-------------|----|-----|-----|------|-------|------|-------------------------------|----------------|----------|----|
| SAE<br>(in.)     | ISO<br>(DN) |    |     |     |      |       |      |                               |                | CF       | SS |
| 1/2              | 13          | 3  | 47  | 57  | 17.5 | 38.1  | 9.0  | 0.02                          | <b>5062-08</b> | —        | —  |
| 3/4              | 19          | 3  | 49  | 66  | 22.3 | 47.6  | 11.0 | 0.02                          | <b>5062-12</b> | —        | —  |
| 1                | 25          | 3  | 53  | 71  | 26.2 | 52.4  | 11.0 | 0.02                          | <b>5062-16</b> | —        | —  |
| 1 1/4            | 32          | 3  | 69  | 80  | 30.2 | 58.7  | 11.5 | 0.03                          | <b>5062-20</b> | —        | —  |
| 1 1/2            | 38          | 3  | 77  | 95  | 35.7 | 69.9  | 13.5 | 0.03                          | <b>5062-24</b> | —        | —  |
| 2                | 51          | 3  | 89  | 103 | 42.9 | 77.8  | 13.5 | 0.04                          | <b>5062-32</b> | —        | —  |
| 2 1/2            | 64          | 3  | 101 | 116 | 50.8 | 89.9  | 13.5 | 0.04                          | <b>5062-40</b> | —        | —  |
| 3                | 76          | 4  | 124 | 136 | 61.9 | 106.4 | 17.0 | 0.07                          | <b>5062-48</b> | —        | —  |
| 3 1/2            | 89          | 4  | 136 | 152 | 69.9 | 102.7 | 17.0 | 0.07                          | <b>5062-56</b> | —        | —  |
| 4                | 102         | 4  | 146 | 162 | 77.8 | 130.2 | 17.0 | 0.09                          | <b>5062-64</b> | —        | —  |
| 5                | 127         | 4  | 180 | 184 | 92.1 | 152.4 | 17.0 | 0.10                          | <b>5062-80</b> | —        | —  |

### 6000 PSI Series

|       |    |   |     |     |      |       |      |      |                |   |   |
|-------|----|---|-----|-----|------|-------|------|------|----------------|---|---|
| 1/2   | 13 | 4 | 47  | 57  | 18.2 | 40.5  | 9.0  | 0.02 | <b>5063-08</b> | — | — |
| 3/4   | 19 | 4 | 53  | 71  | 23.8 | 50.8  | 11.0 | 0.02 | <b>5063-12</b> | — | — |
| 1     | 25 | 4 | 66  | 80  | 27.8 | 57.1  | 13.0 | 0.03 | <b>5063-16</b> | — | — |
| 1 1/4 | 32 | 4 | 77  | 94  | 31.8 | 66.7  | 15.0 | 0.04 | <b>5063-20</b> | — | — |
| 1 1/2 | 38 | 4 | 89  | 103 | 36.5 | 79.4  | 17.0 | 0.05 | <b>5063-24</b> | — | — |
| 2     | 51 | 4 | 123 | 135 | 44.5 | 96.8  | 21.0 | 0.06 | <b>5063-32</b> | — | — |
| 2 1/2 | 64 | 4 | 150 | 166 | 58.7 | 123.8 | 25.0 | 0.08 | <b>5063-40</b> | — | — |
| 3     | 76 | 4 | 178 | 208 | 71.4 | 152.4 | 32.0 | 0.10 | <b>5063-48</b> | — | — |

\*Please add suffix **RVS** after partnumber if stainless steel is required.