


5112 / 5113 - SAE 4 bolt flange with test point port

SAE Flange with test point port
(ISO 6162-1/-2)

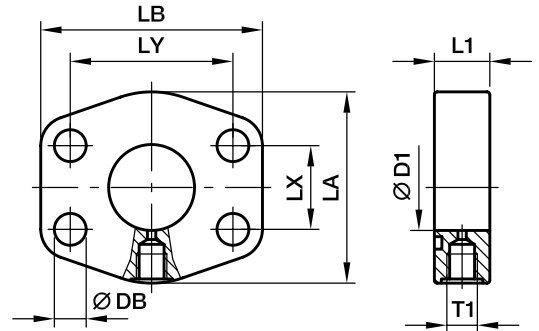

3000 PSI Series

Nom. flange size SAE (in.)	ISO (DN)	T1	D1	L1	LA	LB	LX	LY	DB	Weight (steel) kg/piece	Order code*	PN (bar) ¹⁾	
												S	SS
1	25	G 1/4	25	22	53	71	26.2	52.4	11.0	0.65	5112-16	348	348
1 1/4	32	G 1/4	31	20	69	80	30.2	58.7	11.5	0.75	5112-20	278	278
1 1/2	38	G 1/4	38	25	77	94	35.7	69.9	13.5	0.80	5112-24	210	210
2	51	G 1/4	50	25	89	103	42.9	77.8	13.5	1.25	5112-32	210	210
2 1/2	64	G 1/4	63	25	101	115	50.8	88.9	13.5	1.75	5112-40	175	175
3	76	G 1/4	73	27	124	135	61.9	106.4	17.0	2.25	5112-48	138	138
3 1/2	89	G 1/4	89	27	136	152	61.9	120.7	17.0	3.00	5112-56	35	35
4	102	G 1/4	99	26	146	162	77.8	130.2	17.0	4.25	5112-64	35	35
5	127	G 1/4	120	23	180	184	92.1	152.4	17.0	5.75	5112-80	35	35

6000 PSI Series

1	25	G 1/4	25	22	69	80	27.8	57.2	13.0	0.65	5113-16	420	420
1 1/4	32	G 1/4	31	26	77	94	31.8	66.6	15.0	0.75	5113-20	420	420
1 1/2	38	G 1/4	38	30	89	106	36.5	79.3	17.0	0.95	5113-24	420	420
2	51	G 1/4	50	36	116	135	44.5	96.8	21.0	1.25	5113-32	420	420
2 1/2	64	G 1/4	63	45	150	166	58.7	123.8	25.0	1.75	5113-40	420	420
3	76	G 1/4	73	55	178	208	71.4	152.4	32.0	2.25	5113-48	420	420

*Please add suffix **RVS** after partnumber if stainless steel is required.