


9026-.. - Ball valve with SAE adapter / split flange adapter

ISO 6162-1 - 3000 PSI

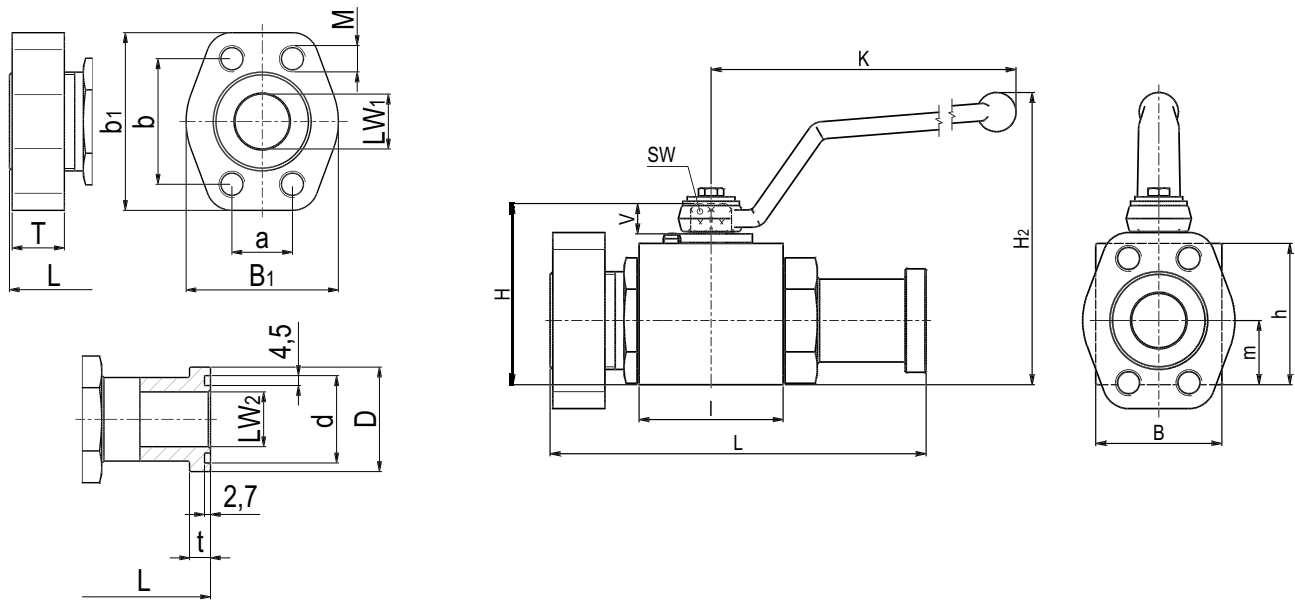

LW ₁	LW ₂	I	B	H	h	m	V	SW	K	H ₂	L	B ₁	b ₁	T	a	b	M	d	D	t	Weight kg/1 piece	Order code	PN (bar)
13	13	48	35	54	40	19	11	9	115	89	136	48	56	13	17,5	38,1	M8	25,5	30,2	6,8	1,18	9026-08	350
20	19	62	49	75	57	24,5	14	14	171	127	149	50	65	14	22,2	47,6	M10	31,9	38,1	6,8	2,15	9026-12	350
25	25	66	58	83	65	29,5	14	14	171	135	163	60	70	16	26,2	52,4	M10	39,8	44,4	8,1	3,60	9026-16	315
32	30	80	81	107	86	40,5	16,5	17	306	180	181	68	79	16	30,2	58,7	M10	44,6	50,8	8,1	5,87	9026-20	280
38	38	85	100	124	103	50	16,5	17	306	197	204	78	93	16	35,7	69,9	M12	54,1	60,3	8,1	8,82	9026-24	210
48	48	100	118	138	117	59	16,5	17	306	211	214	90	102	16	42,9	77,8	M12	63,6	71,4	9,6	14,30	9026-32	210

Please note the pressure ratings of the tube connections!