


DA - Distance piece adapter

EO 24° DKO swivel / EO 24° cone end

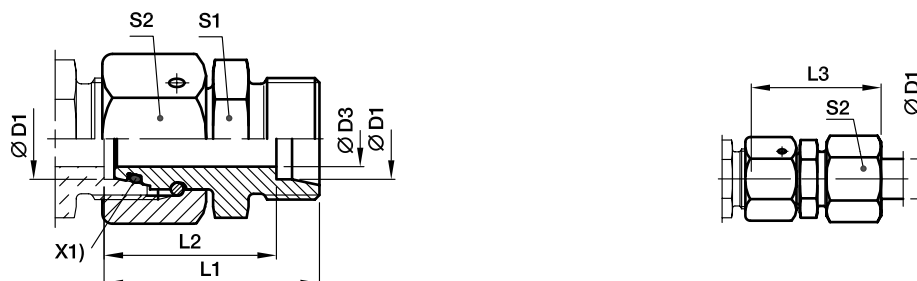

X1) O-ring OR

Series	Ø D1	D3	L1	L2	L3	S1	S2	Weight g/1 piece	Order code	PN (bar)		
										CF	71	MS
L	06	2,5	43.0	36	51	12	14	33	DA06L	500	315	200
	08	4.0	43.0	36	51	14	17	46	DA08L	500	315	200
	10	6.0	43.0	36	51	17	19	60	DA10L	500	315	200
	12	8.0	43.0	36	51	19	22	75	DA12L	400	315	200
	15	10.0	43.0	36	51	24	27	118	DA15L	400	315	200
	18	13.0	43.5	36	52	27	32	153	DA18L	400	315	200
	22	17.0	47.5	40	56	32	36	210	DA22L	250	160	100
	28	22.0	47.5	40	57	41	41	279	DA28L	250	160	100
	35	28.0	60.5	50	72	46	50	468	DA35L	250	160	100
S	42	34.0	71.0	60	83	55	60	802	DA42L	250	160	100
	06	2.5	43.0	36	51	14	17	48	DA06S	800	630	400
	08	4.0	43.0	36	51	17	19	64	DA08S	800	630	400
	10	6.0	43.5	36	52	19	22	81	DA10S	800	630	400
	12	8.0	43.5	36	52	22	24	97	DA12S	630	630	400
	14	9.0	48.0	40	58	24	27	133	DA14S	630	630	400
	16	11.0	48.5	40	58	27	30	166	DA16S	630	400	250
	20	14.0	56.5	46	68	32	36	265	DA20S	420	400	250
	25	18.0	62.0	50	74	41	46	466	DA25S	420	400	250
	30	23.0	69.5	56	83	46	50	601	DA30S	420	400	250
	38	30.0	76.0	60	91	55	60	871	DA38S	420	315	200

Order code suffixes			
	Stainless Steel	Brass	Body Only
Suffix	71	MS	OMD
Example	DA16S71	DA16SMS	DA16SOMD