


## GEO - Male stud connector

Male metric thread – O-ring (ISO 6149) / EO 24° cone end

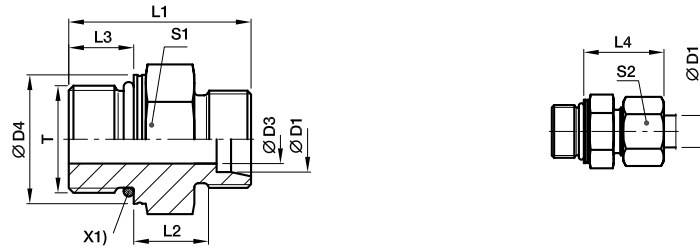

X1) O-ring OR

Series	Ø D1	T	D3	D4	L1	L2	L3	L4	S1	S2	Weight g/1 piece	Order code	PN (bar)	
													CF	71
LL	04	M 08×1.0	3.0	10.8	20.0	9.5	6.5	19.0	11*	10	8	GE004LLM	100	100
	04	M 10×1.0	3.0	12.8	20.0	9.5	6.5	19.0	13	10	11	GE004LLM10X1	100	
	06	M 10×1.0	4.5	12.8	20.0	8.0	6.5	19.5	13	12	10	GE006LLM	100	
L	06	M 10×1.5	4.5	14.0	24.0	8.5	8.5	23.0	14	14	15	GE006LM	500	315
	08	M 12×1.5	6.0	17.0	28.0	10.0	11.0	25.0	17	17	23	GE008LM	500	315
	10	M 14×1.5	7.5	19.0	29.0	11.0	11.0	26.0	19	19	28	GE010LM	500	315
	12	M 16×1.5	9.0	22.0	31.0	12.5	11.5	27.0	22	22	40	GE012LM	400	315
	15	M 18×1.5	11.0	24.0	33.0	13.5	12.5	29.0	24	27	56	GE015LM	400	315
	18	M 22×1.5	14.0	27.0	35.0	14.5	13.0	31.0	27	32	80	GE018LM	400	315
	22	M 27×2.0	18.0	32.0	40.0	16.5	16.0	33.0	32	36	104	GE022LM27X2	250	160
	28	M 33×2.0	23.0	41.0	41.0	17.5	16.0	34.0	41	41	171	GE028LM	250	160
	35	M 42×2.0	30.0	50.0	44.0	17.5	16.0	39.0	50	50	278	GE035LM	250	160
42	M 48×2.0	36.0	55.0	47.5	19.0	17.5	42.0	55	60	340	GE042LM	250	160	
S	06	M 12×1.5	4.0	17.0	31.0	13.0	11.0	28.0	17	17	29	GE006SM	800	630
	08	M 14×1.5	6.0	19.0	33.0	15.0	11.0	30.0	19	19	41	GE008SM	800	630
	10	M 16×1.5	7.0	22.0	35.0	15.0	12.5	31.0	22	22	55	GE010SM	800	630
	12	M 18×1.5	9.0	24.0	38.5	17.0	14.0	33.0	24	24	73	GE012SM	630	630
	16	M 22×1.5	12.0	27.0	42.0	18.5	15.0	37.0	27	30	102	GE016SM	630	400
	20	M 27×2.0	15.0	32.0	49.5	20.5	18.5	42.0	32	36	169	GE020SM	420	400
	25	M 33×2.0	20.0	41.0	53.5	23.0	18.5	47.0	41	46	274	GE025SM	420	400
	30	M 42×2.0	26.0	50.0	56.0	23.5	19.0	50.0	50	50	412	GE030SM	420	400
38	M 48×2.0	32.0	55.0	63.5	26.0	21.5	57.0	55	60	580	GE038SM	420	315	

\*S1=SW12 in 1.4571

Order code suffixes		
	Stainless Steel	
Suffix	71	
Example	GE016SM71	