


MAV - Pressure gauge connector

Female BSPP thread / EO 24° cone end

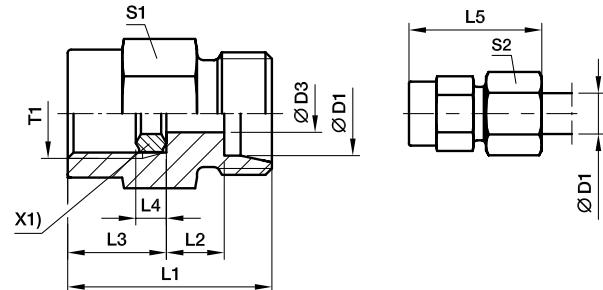

X1) Sealing-ring DK1

Series	Ø D1	T1	D3	L1	L2	L3	L4	L5	S1	S2	Weight g/1 piece	Order code	PN (bar)		
													CF	71	MS
LL	04	G 1/4	2.5	27	8.5	14.5	4.5	33	19	10	33	MAV04LLR	100		
L	06	G 1/4	2.5	29	7.5	14.5	4.5	37	19	14	37	MAV06LR	500	315	200
	08	G 1/4	5.5	29	7.5	14.5	4.5	37	19	17	38	MAV08LR	500	315	200
	10	G 1/4	5.5	30	8.5	14.5	4.5	38	19	19	41	MAV10LR	500	315	200
	12	G 1/4	5.5	30	8.5	14.5	4.5	38	19	22	43	MAV12LR	400	315	200
S	06	G 1/2	3.5	38	11.0	20.0	5.0	46	27	17	86	MAV06SR	630	630	400
	08	G 1/2	3.5	38	11.0	20.0	5.0	46	27	19	86	MAV08SR	630	630	400
	10	G 1/2	7.5	38	10.5	20.0	5.0	47	27	22	88	MAV10SR	630	630	400
	12	G 1/2	7.5	38	10.5	20.0	5.0	47	27	24	93	MAV12SR	630	630	400

Order code suffixes			
	Stainless Steel	Brass	Body Only
Suffix	71	MS	OMD
Example	MAV08LR71	MAV08LRMS	MAV08LRMD